



EXVISTA

JINWOO ELTEC
Spor & Liman LED
Aydınlatma



RoHS



Bwt-Altek Su Arıtma ve Enerji Sistemleri A.Ş.

Adress: Mahmut Yesari Cad. No: 18, Koşuyolu Mah, Kadıköy, İstanbul, 34718

Tel / Fax: 0216 326 54 75 / 0216 326 54 76

E-mail: led@bwतालtek.com.tr

Web: www.bwतालtek.com.tr

www.sports-lighting.co.kr

EXVISTA LED 160W



Power Consumption	160W	Luminous flux	19,680 lm
Voltage Range	90Vac ~ 305Vac	Efficacy	123 lm/w(+/-5%)
Frequency	50Hz ~ 60Hz	Beam Angle	15°/30°/45°/60°/120°
Power Factor	0.95	IP	IP66
CCT	5700K	Size(mm)	263×113×150
CRI	75Ra, 80Ra, 90Ra	Weight(kg)	3kg
Flicker	Free (600fps)	Life Time	50,000 hr

EXVISTA LED 400W



Power Consumption	400W	Luminous flux	49,200 lm
Voltage Range	90Vac ~ 305Vac	Efficacy	123 lm/w(+/-5%)
Frequency	50Hz ~ 60Hz	Beam Angle	15°/30°/45°/60°/120°
Power Factor	0.95	IP	IP66
CCT	5700K	Size(mm)	379×381×105
CRI	75Ra, 80Ra, 90Ra	Weight(kg)	11kg
Flicker	Free (600fps)	Life Time	50,000 hr

EXVISTA LED 600W



Power Consumption	600W	Luminous flux	73,800 lm
Voltage Range	90Vac ~ 305Vac	Efficacy	123 lm/w(+/-5%)
Frequency	50Hz ~ 60Hz	Beam Angle	15°/30°/45°/60°/120°
Power Factor	0.95	IP	IP66
CCT	5700K	Size(mm)	379×381×105
CRI	75Ra, 80Ra, 90Ra	Weight(kg)	11kg
Flicker	Free (600fps)	Life Time	50,000 hr

EXVISTA LED 800W



Power Consumption	800W	Luminous flux	98,400 lm
Voltage Range	90Vac ~ 305Vac	Efficacy	123 lm/w(+/-5%)
Frequency	50Hz ~ 60Hz	Beam Angle	15°/30°/45°/60°/120°
Power Factor	0.95	IP	IP66
CCT	5700K	Size(mm)	540×400×118
CRI	75Ra, 80Ra, 90Ra	Weight(kg)	21kg
Flicker	Free (600fps)	Life Time	50,000 hr


EXVISTA LED 1200W



Power Consumption	1200W	Luminous flux	147,600 lm
Voltage Range	90Vac ~ 305Vac	Efficacy	123 lm/w(+/-5%)
Frequency	50Hz ~ 60Hz	Beam Angle	15°/30°/45°/60°/120°
Power Factor	0.95	IP	IP66
CCT	5700K	Size(mm)	540×400×118
CRI	75Ra, 80Ra, 90Ra	Weight(kg)	24kg
Flicker	Free (600fps)	Life Time	50,000 hr

EXVISTA LED 1500W


Power Consumption	1500W	Luminous flux	184,500 lm
Voltage Range	90Vac ~ 305Vac	Efficacy	123 lm/w(+/-5%)
Frequency	50Hz ~ 60Hz	Beam Angle	15°/30°
Power Factor	0.95	IP	IP66
CCT	5700K	Life Time	50,000 hr
CRI	75Ra, 80Ra, 90Ra	Size(mm)	Diameter: 300 Length: 150
Flicker	Free (600fps)	Weight(kg)	34kg

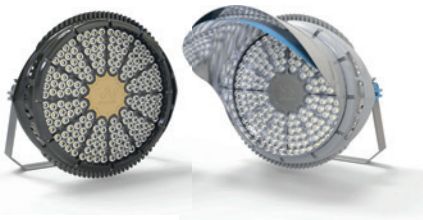






Teknoloji ve Projelendirme

- Type of light fixture : 1200W LED Sports flood light
- Lamp Avg life time : 50,000hrs
- Average beam maintenance ratio : Over 90 percent
- Measurement space range : 10m x 10m

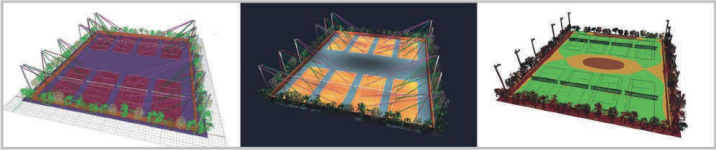

Illuminance			
Average illuminance	Eav		551 lx
Minimum illuminance	Emin		541 lx
Maximum illuminance	Emax		562 lx
Uniformity Uo	Emin/Em		1:1.02 (0.98)
Diversity Ud	Emin/Emax		1:1.04 (0.96)

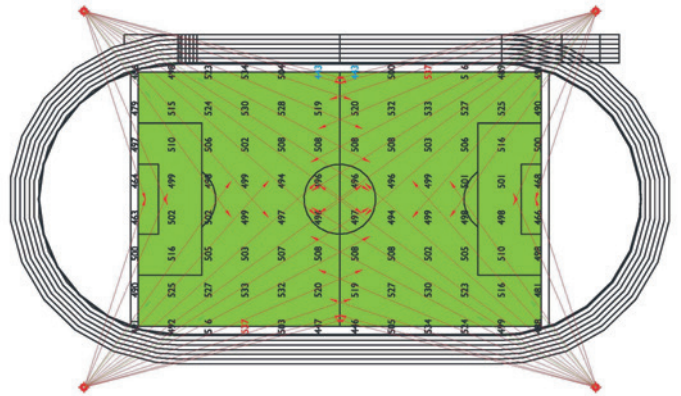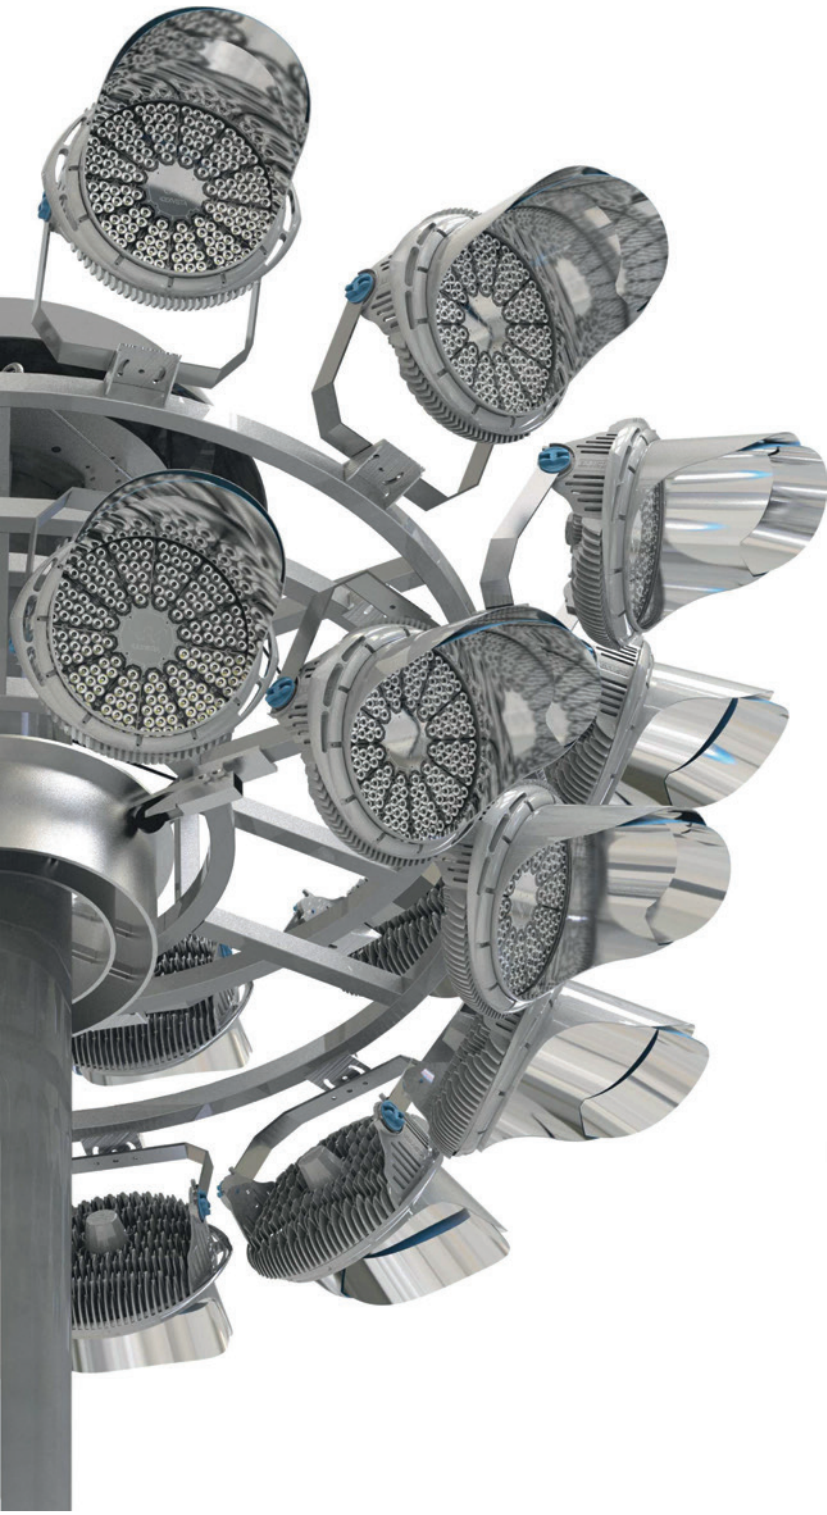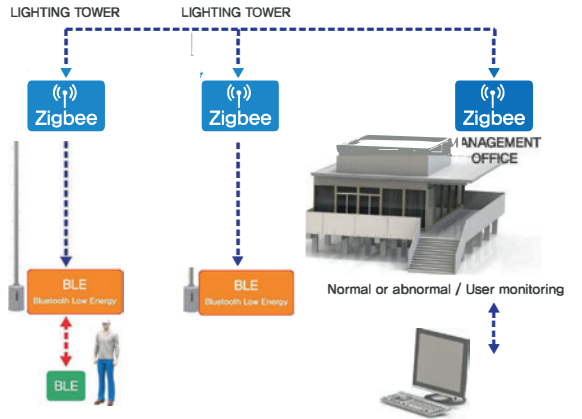

- Type of light fixture : 1200W LED Sports flood light
- Lamp Avg life time : 50,000hrs
- Average beam maintenance ratio : Over 95 percent
- Measurement space range : 10m x 10m



Illuminance			
Average illuminance	Eav		504 lx
Minimum illuminance	Emin		443 lx
Maximum illuminance	Emax		537 lx
Uniformity Uo	Emin/Em		1:1.14 (0.88)
Diversity Ud	Emin/Emax		1:1.21 (0.82)

